

# SR1020 THRU SR10200

## SCHOTTKY BARRIER RECTIFIER

**REVERSE VOLTAGE:** 20 to 200 VOLTS  
**FORWARD CURRENT:** 10.0 AMPERE

### FEATURES

- Plastic package has UL flammability classification 94V-0
- Metal of silicon rectifier, majority carrier conduction
- Guard ring for transient protection
- High capability
- Low power loss, high efficiency
- High current capability, low  $V_F$
- High surge capacity
- For use in low voltage, high frequency inverters, free whelling, and polarity protection applications

### MECHANICAL DATA

Case: Molded plastic, TO-220A

Epoxy: UL 94V-0 rate flame retardant


Terminals: Leads solderable per MIL-STD-202 method 208 guaranteed

Polarity: As marked

Mounting position: Any

Weight: 0.08ounce, 2.24gram

### TO-220A

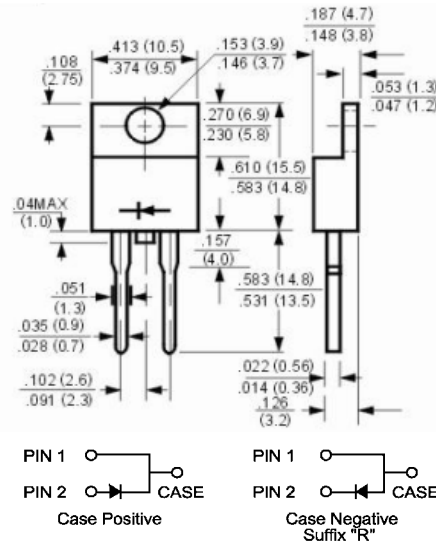

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	SR1020	SR1030	SR1040	SR1050	SR1060	SR1080	SR10100	SR10150	SR10200	Units	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	200	Volts	
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	140	Volts	
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	80	100	150	200	Volts	
Maximum Average Forward Rectified Current See Fig. 1	$I_{(AV)}$	10.0									Amp	
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	200					150				Amp	
Maximum Forward Voltage at 10.0A DC and 25°C	$V_F$	0.55			0.7		0.85		0.95		Volts	
Maximum Reverse Current at $T_C=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_C=125^\circ\text{C}$	$I_R$	1.0									mAmp	
		50			25							
Typical Junction Capacitance (Note 1)	$C_J$	600					400					pF
Typical Thermal Resistance (Note 2)	$R_{\theta JC}$	2.5										°C/W
Operating Temperature Range	$T_J$	-55 to +125				-55 to +150						°C
Storage Temperature Range	$T_{stg}$	-55 to +150										°C

### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance from Junction to Case Per Leg

# SR1020 THRU SR10200

## SCHOTTKY BARRIER RECTIFIER

### RATINGS AND CHARACTERISTIC CURVES

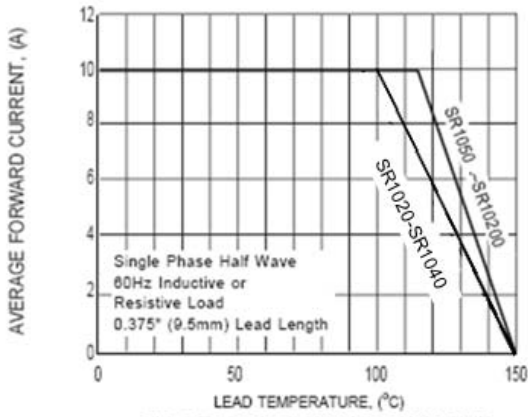


FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE

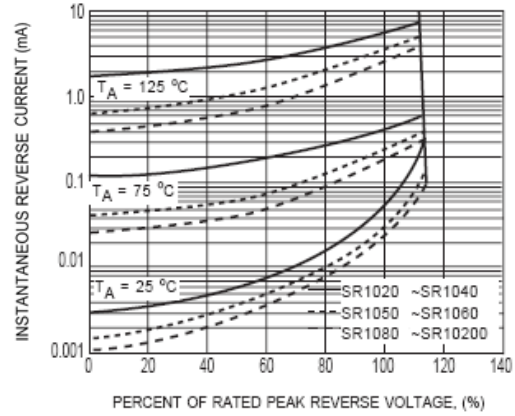


FIG.2 TYPICAL REVERSE CHARACTERISTICS

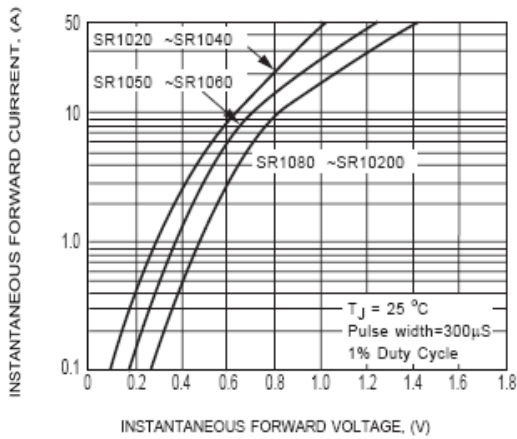


FIG.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

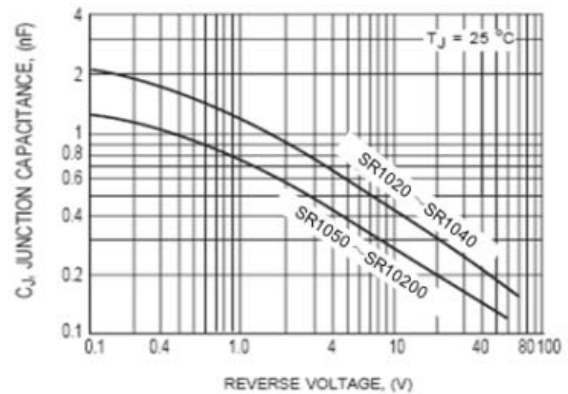


FIG.4 TYPICAL JUNCTION CAPACITANCE

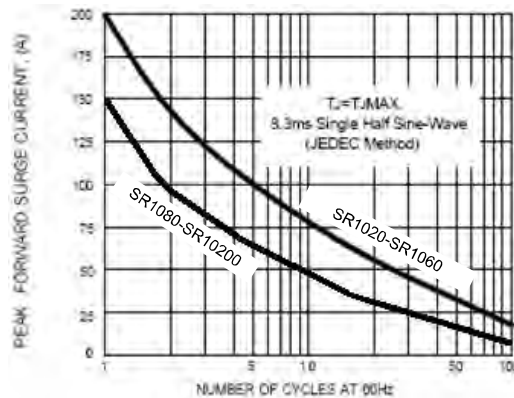


FIG.5 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT